



36 Months Warranty*

*for PRIVATE passenger vehicle use, subject to terms and conditions


DIMENSIONAL SPECIFICATIONS

OVERALL DIMENSIONS	METRIC (mm)
LENGTH	259
WIDTH	173
HEIGHT (bottom to top cover)	202
TOTAL HEIGHT (bottom to top of terminal)	223
NOMINAL WEIGHT	18.81 kg

TECHNICAL SPECIFICATIONS


COLD CRANKING AMPS (CCA)	750 CCA
	Test reference: AS60095.1: 2022 Rated CCA DCH at 18°C for 30 sec
CAPACITY (RC)	160 mins
	Test reference: AS60095.1: 2022 25 Amps DCH at 10.5 V cut-off voltage

PART NUMBER	XN50ZZMF	
CHARACTERISTIC	Lead-Acid Sealed Maintenance Free	
GROUP SIZE	JIS: D26/NS70	
CASE AND LID	Material	Polypropylene (PP)
	Handle	1-pc PP handle
	Case Colour	Black Casing
	Lid Colour	Red Lid
	Ledge / Hold-down	Recessed ledge on longer sides
	Vent	Centralized venting


TERMINAL DATA	POSITIVE	NEGATIVE
TYPE	SAE	SAE
TERMINAL HEIGHT (mm)	18.5±1.50	18.5±1.50
BOTTOM DIAMETER (mm)	19.5+0/-0.3	17.5+0/-0.3
TAPER	1:9	1:9
POLARITY		

AMPERE-HOUR (20-HOUR CAPACITY)	90 AH
	Test reference: AS60095.1: 2022
	Rated AH DCH at 10.5 V cut-off
PLATE DESIGN	Lead-Calcium Alloy Full Frame Plate Design
ELECTROLYTE	36% H2SO4 at 15°C

TOP VIEW

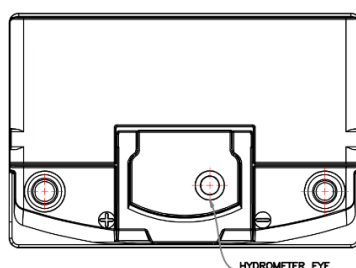

FRONT VIEW

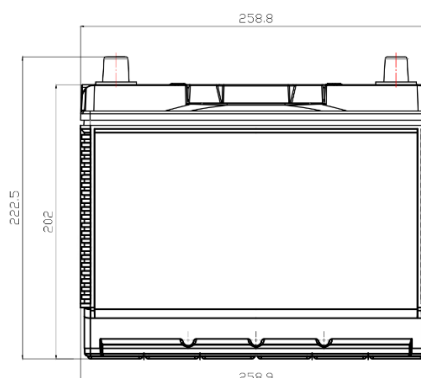

SIDE VIEW

