



HC40

Nominal Technical Specifications



HC series is especially used for engine starting, which requires superior cranking performance at lower temperatures, for high current discharge.

Nominal Capacity

20 Hour Rate	40AH
--------------	-------------

Reserve Capacity

Reserve@25 Amps	70Min	Reserve@75 Amps	18Min
-----------------	--------------	-----------------	--------------

Electrical Specifications

Nominal Voltage	12 Volt
C20	40 AH
C5	34.4 AH
CCA	500 A
CA or MCA	600 A
HCA	700 A
PHCA	1100 A
Short Circuit Current	1579 A
Internal Resistance	7.9 mΩ
Self-Discharge@25°C	≤ 3% per month

Mechanical Specifications

Group Size	N/A	
Terminal Type	M6M- Stud Terminal	
Terminal Torque	31~44 in-lbs	
Height(w/terminal)	206 mm	8.11"
Height(case only)	192 mm	7.56"
Width	97 mm	3.82"
Length	250 mm	9.84"
Weight	14.0 Kg	30.86 lbs.
Case Type	ABS Plastic- Flame Res. Rating UL94-HB	




Operational Data

Operating Temperature	-4°F to 122°F (-20°C to +50°C). At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.
------------------------------	---

Charging Instructions

Maximum Charge Current (A)	25% of C ₂₀
Absorption Voltage	14.4V-14.7V
Float Voltage	13.5V-13.8V

PHYSICAL CHARACTERISTICS

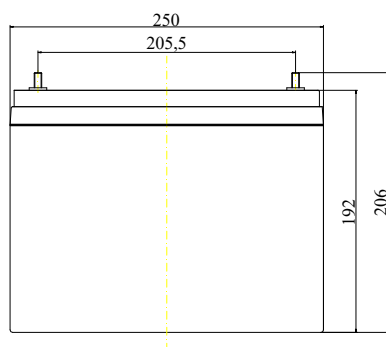

Terminal: M6M
unit:mm

