




<b>PART NUMBER</b>	<b>X60DPMF</b>	
<b>CHARACTERISTIC</b>	Lead-Acid Sealed Maintenance Free	
<b>GROUP SIZE</b>	JIS: B24/NS60	
<b>CASE AND LID</b>	Material	Polypropylene (PP)
	Handle	1-pc PP handle
	Case Colour	Black Casing
	Lid Colour	Red Lid
	Ledge / Hold-down	No ledge
	Vent	Centralized venting

**42 Months Warranty\***

\*for PRIVATE passenger vehicle use, subject to terms and conditions

**DIMENSIONAL SPECIFICATIONS**

OVERALL DIMENSIONS	METRIC (mm)
LENGTH	236
WIDTH	128
HEIGHT (bottom to top cover)	200
TOTAL HEIGHT (bottom to top of terminal)	219
NOMINAL WEIGHT	12.73 kg


TERMINAL DATA	POSITIVE	NEGATIVE
TYPE	JIS	JIS
TERMINAL HEIGHT (mm)	18.5±1.50	18.5±1.50
BOTTOM DIAMETER (mm)	14.7+0/-0.3	13.0+0/-0.3
TAPER	1:9	1:9
POLARITY		

**TECHNICAL SPECIFICATIONS**


COLD CRANKING AMPS (CCA)	480 CCA
	Test reference: AS60095.1: 2022 Rated CCA DCH at 18°C for 30 sec
CAPACITY (RC)	125 mins
	Test reference: AS60095.1: 2022 25 Amps DCH at 10.5 V cut-off voltage

AMPERE-HOUR (20-HOUR CAPACITY)	75 AH
	Test reference: AS60095.1: 2022
	Rated AH DCH at 10.5 V cut-off
PLATE DESIGN	Lead-Calcium Alloy Full Frame Plate Design
ELECTROLYTE	36% H2SO4 at 15°C

TOP VIEW

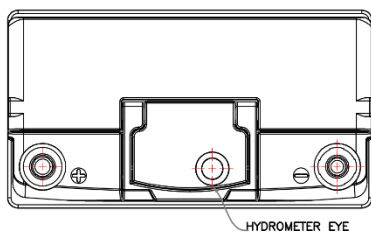

FRONT VIEW

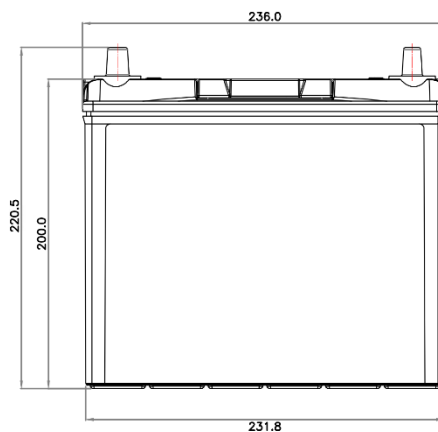

SIDE VIEW

