

EXIDE® Batteries

Revision No. 00
Release Date: May 2025



| | | |
|-----------------------|-----------------------------------|-----------------------------|
| PART NUMBER | XDIN66DMF | |
| CHARACTERISTIC | Lead-Acid Sealed Maintenance Free | |
| GROUP SIZE | LB3/DIN66 | |
| CASE AND LID | Material | Polypropylene (PP) |
| | Handle | 1-pc PP handle |
| | Case Colour | Black Casing |
| | Lid Colour | Red Lid |
| | Ledge / Hold-down | Recessed ledge on all sides |
| | Vent | Centralized venting |

42 Months Warranty*

*for PRIVATE passenger vehicle use, subject to terms and conditions

DIMENSIONAL SPECIFICATIONS

| OVERALL DIMENSIONS | METRIC (mm) |
|--|-------------|
| LENGTH | 271 |
| WIDTH | 175 |
| HEIGHT (bottom to top cover) | 175 |
| TOTAL HEIGHT (bottom to top of terminal) | 175 |
| NOMINAL WEIGHT | 16.73 kg |


| TERMINAL DATA | POSITIVE | NEGATIVE |
|----------------------|-------------|-------------|
| TYPE | SAE | SAE |
| TERMINAL HEIGHT (mm) | 18.5±1.50 | 18.5±1.50 |
| BOTTOM DIAMETER (mm) | 19.5+0/-0.3 | 17.5+0/-0.3 |
| TAPER | 1:9 | 1:9 |
| POLARITY | | |

TECHNICAL SPECIFICATIONS


| | |
|--------------------------|--|
| COLD CRANKING AMPS (CCA) | 740 CCA |
| | Test reference: AS60095.1: 2022 Rated CCA DCH at 18°C for 30 sec |
| CAPACITY (RC) | 130 mins |
| | Test reference: AS60095.1: 2022 25 Amps DCH at 10.5 V cut-off voltage |

| | |
|--------------------------------|---|
| AMPERE-HOUR (20-HOUR CAPACITY) | 80 AH |
| | Test reference: AS60095.1: 2022 |
| | Rated AH DCH at 10.5 V cut-off |
| PLATE DESIGN | Lead-Calcium Alloy Full Frame Plate Design |
| ELECTROLYTE | 36% H ₂ SO ₄ at 15°C |

TOP VIEW

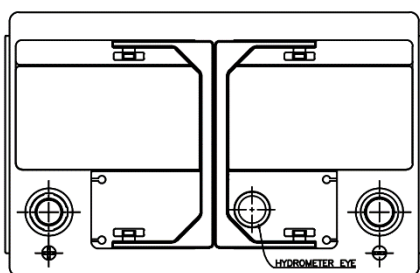

FRONT VIEW

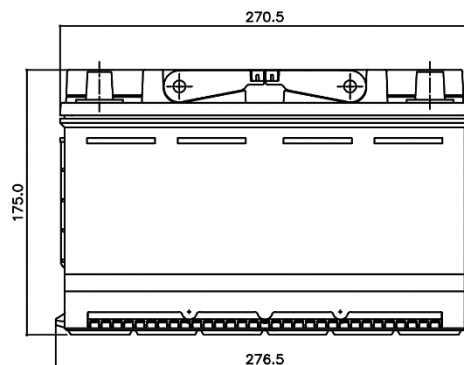

SIDE VIEW

