



### 36 Months Warranty\*

\*for PRIVATE passenger vehicle use, subject to terms and conditions


## DIMENSIONAL SPECIFICATIONS

| OVERALL DIMENSIONS                       | METRIC (mm) |
|------------------------------------------|-------------|
| LENGTH                                   | 233         |
| WIDTH                                    | 173         |
| HEIGHT (bottom to top cover)             | 201         |
| TOTAL HEIGHT (bottom to top of terminal) | 220         |
| NOMINAL WEIGHT                           | 16.54 kg    |

## TECHNICAL SPECIFICATIONS


|                          |                                                                             |
|--------------------------|-----------------------------------------------------------------------------|
| COLD CRANKING AMPS (CCA) | 600 CCA                                                                     |
|                          | Test reference:<br>AS60095.1: 2022<br>Rated CCA DCH at 18°C for 30 sec      |
| CAPACITY (RC)            | 105 mins                                                                    |
|                          | Test reference:<br>AS60095.1: 2022<br>25 Amps DCH at 10.5 V cut-off voltage |

|                |                                   |                                |
|----------------|-----------------------------------|--------------------------------|
| PART NUMBER    | 55D23CMF                          |                                |
| CHARACTERISTIC | Lead-Acid Sealed Maintenance Free |                                |
| GROUP SIZE     | JIS: D23/NS50                     |                                |
| CASE AND LID   | Material                          | Polypropylene (PP)             |
|                | Handle                            | 1-pc PP handle                 |
|                | Case Colour                       | Black Casing                   |
|                | Lid Colour                        | Blue Lid                       |
|                | Ledge / Hold-down                 | Recessed ledge on longer sides |
|                | Vent                              | Centralized venting            |


| TERMINAL DATA        | POSITIVE                                                                              | NEGATIVE    |
|----------------------|---------------------------------------------------------------------------------------|-------------|
| TYPE                 | SAE                                                                                   | SAE         |
| TERMINAL HEIGHT (mm) | 18.5±1.50                                                                             | 18.5±1.50   |
| BOTTOM DIAMETER (mm) | 19.5+0/-0.3                                                                           | 17.5+0/-0.3 |
| TAPER                | 1:9                                                                                   | 1:9         |
| POLARITY             |  |             |

|                                |                                               |
|--------------------------------|-----------------------------------------------|
| AMPERE-HOUR (20-HOUR CAPACITY) | 60 AH                                         |
|                                | Test reference:<br>AS60095.1: 2022            |
|                                | Rated AH DCH at 10.5 V cut-off                |
| PLATE DESIGN                   | Lead-Calcium Alloy<br>Full Frame Plate Design |
| ELECTROLYTE                    | 36% H2SO4 at 15°C                             |

TOP VIEW

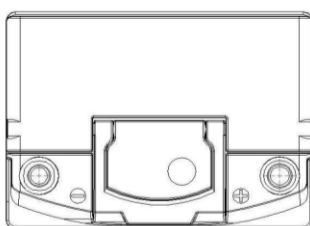

FRONT VIEW

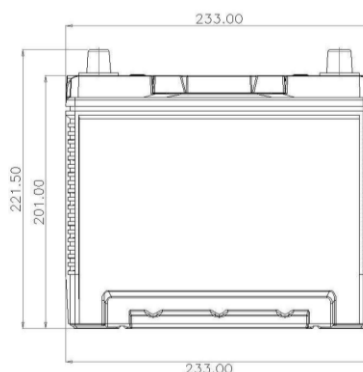

SIDE VIEW

