

LITHIUM

LiFePO4

MAX

LITHIUM (LiFePO4) | High Performance

REF

BSLi-02 MAX



TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


FEATURES

- Fast charging
- Multi-positioning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230°C
- Lighter weight

REPLACEMENTS

LITHIUM	SLA	MF	DRY
BSLi-02	BB4L-B	BTX4L-BS+/-	BB4L-B
	BB7C-A	BTZ5S-BS	BB6.5L-B
	BB7L-B2	BTX5L-BS	BB7C-A
	BTX4L+/-	BTX7L-BS	BB7L-B
	BTZ5S	BTZ7S-B	BB7L-B2
	BTX5L/BTZ6S		
	BTX7L		
	BTZ7S		
	BTZ7V		
	BTZ8V		

MOUNTING ANGLE

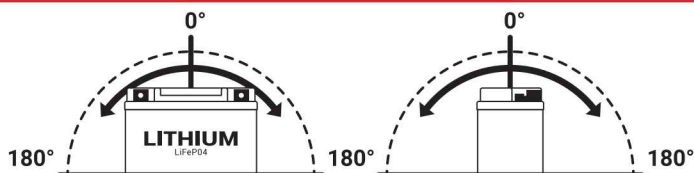

High inclinasion

NON-SPILLABLE

12_v VOLTAGE

36_{Wh} ENERGY

180_A CCA

OPERATING TEMP. RANGE

Charge temperature:

0°C to 45°C

Discharge temperature:

-20°C to 55°C

Storage temperature:

0°C to 30°C

DIMENSIONS & WEIGHT

Length (L):

114mm ±1mm

Width (W):


70mm ±1mm

Height (H):


85mm ±1mm

Weight

0.750kg (tolerance ±3%)

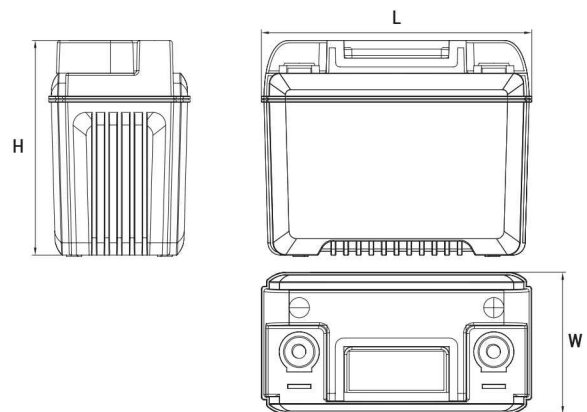

TERMINALS (mm)

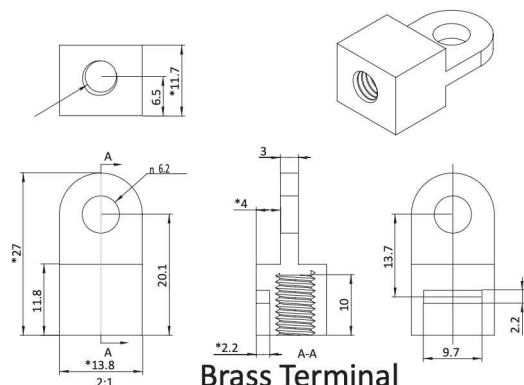

Brass Terminal