

LITHIUM

LiFePO4

MAX

LITHIUM (LiFePO4) | High Performance

REF

BSLi-12 MAX

12_v

VOLTAGE

216_{Wh}

ENERGY

900_A

CCA

TECHNOLOGY

- Lithium Iron Phosphate cells construction
- Pre-charged batteries
- Homologated by OEM


FEATURES

- Fast charging
- Multi-positionning mounting
- Very safe and environmental friendly
- Extensive cycle life: over 2000 cycles
- Very low self-discharge
- Cold temperature performance
- Waterproof design
- Ready to use: just plug and play
- Robust brass terminals
- Heat resistance: up to 230°C
- Lighter weight

REPLACEMENTS

LITHIUM	SLA	MF	DRY
BSLi-12	BIX30L	BIX30L-BS	BB30L-B
	BIX30HL		BB30CL-B
	53030		B60-N30L-A
			12N24-3A
			52515
			53030

MOUNTING ANGLE

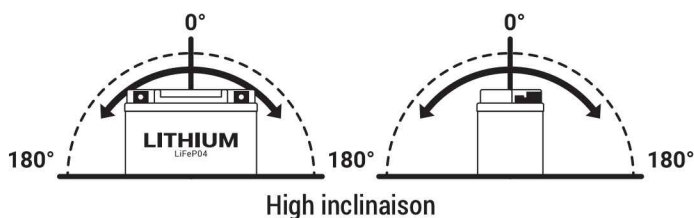

NON-SPILLABLE

OPERATING TEMP. RANGE

Charge temperature:

0°C to 45°C

Discharge temperature:

-20°C to 55°C

Storage temperature:

0°C to 30°C

DIMENSIONS & WEIGHT

Length (L):

166mm ±1mm

Width (W):


127mm ±1mm

Height (H):

175mm ±1mm

Weight

3.04kg (tolerance ±3%)

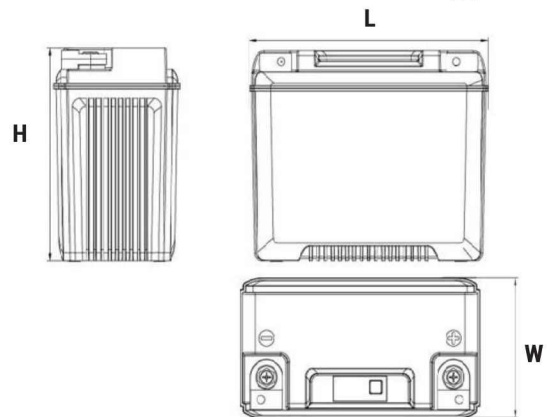

TERMINALS (mm)

