



# Batteries

Revision No. 00  
Release Date: May 2025



**36 Months Warranty\***

\*for PRIVATE passenger vehicle use, subject to terms and conditions

|                       |                                   |                                |
|-----------------------|-----------------------------------|--------------------------------|
| <b>PART NUMBER</b>    | <b>XN50ZZLMF</b>                  |                                |
| <b>CHARACTERISTIC</b> | Lead-Acid Sealed Maintenance Free |                                |
| <b>GROUP SIZE</b>     | JIS: D26/NS70                     |                                |
| <b>CASE AND LID</b>   | Material                          | Polypropylene (PP)             |
|                       | Handle                            | 1-pc PP handle                 |
|                       | Case Colour                       | Black Casing                   |
|                       | Lid Colour                        | Red Lid                        |
|                       | Ledge / Hold-down                 | Recessed ledge on longer sides |
|                       | Vent                              | Centralized venting            |

## DIMENSIONAL SPECIFICATIONS

| OVERALL DIMENSIONS                       | METRIC (mm) |
|--|-------------|
| LENGTH                                   | 259         |
| WIDTH                                    | 173         |
| HEIGHT (bottom to top cover)             | 202         |
| TOTAL HEIGHT (bottom to top of terminal) | 223         |
| NOMINAL WEIGHT                           | 18.81 kg    |


| TERMINAL DATA        | POSITIVE    | NEGATIVE    |
|----------------------|-------------|-------------|
| TYPE                 | SAE         | SAE         |
| TERMINAL HEIGHT (mm) | 18.5±1.50   | 18.5±1.50   |
| BOTTOM DIAMETER (mm) | 19.5+0/-0.3 | 17.5+0/-0.3 |
| TAPER                | 1:9         | 1:9         |
| POLARITY             |             |             |

## TECHNICAL SPECIFICATIONS


|                          |   |
|--------------------------|---|
| COLD CRANKING AMPS (CCA) | 750 CCA   |
|                          | Test reference:<br>AS60095.1: 2022<br>Rated CCA DCH at 18°C for 30 sec      |
| CAPACITY (RC)            | 160 mins  |
|                          | Test reference:<br>AS60095.1: 2022<br>25 Amps DCH at 10.5 V cut-off voltage |

|                                |  |
|--------------------------------|--|
| AMPERE-HOUR (20-HOUR CAPACITY) | 90 AH                                      |
|                                | Test reference:<br>AS60095.1: 2022         |
|                                | Rated AH DCH at 10.5 V cut-off             |
| PLATE DESIGN                   | Lead-Calcium Alloy Full Frame Plate Design |
| ELECTROLYTE                    | 36% H2SO4 at 15°C                          |


TOP VIEW

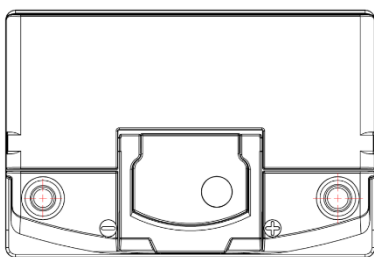

FRONT VIEW

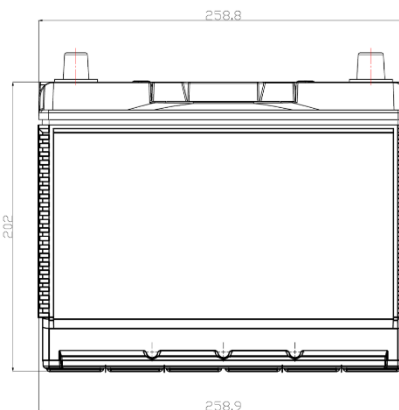

SIDE VIEW

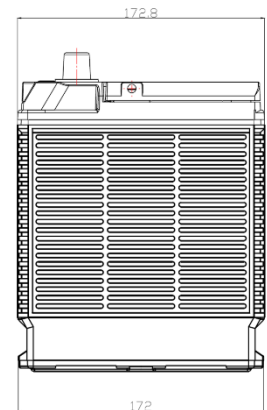

Two Great Stores to choose from...

7 Cemetery Rd,  
Mackay QLD 4740  
Phone 07 4957 6123

Unit 16, 547 Woolcock St,  
Mt Louisa, Townsville QLD 4814  
Phone 07 4774 7344