



Batteries

Revision No. 00
Release Date: May 2025



PART NUMBER	X40CPMF	
CHARACTERISTIC	Lead-Acid Sealed Maintenance Free	
GROUP SIZE	JIS: B20/NS40	
CASE AND LID	Material	Polypropylene (PP)
	Handle	1-pc PP handle
	Case Colour	Black Casing
	Lid Colour	Red Lid
	Ledge / Hold-down	None
	Vent	Centralized venting

42 Months Warranty*

*for PRIVATE passenger vehicle use, subject to terms and conditions

DIMENSIONAL SPECIFICATIONS

OVERALL DIMENSIONS	METRIC (mm)
LENGTH	196
WIDTH	128
HEIGHT (bottom to top cover)	200
TOTAL HEIGHT (bottom to top of terminal)	219
NOMINAL WEIGHT	10.62 kg


TERMINAL DATA	POSITIVE	NEGATIVE
TYPE	JIS	JIS
TERMINAL HEIGHT (mm)	18.5±1.50	18.5±1.50
BOTTOM DIAMETER (mm)	14.7+0/-0.3	13.0+0/-0.3
TAPER	1:9	1:9
POLARITY		

TECHNICAL SPECIFICATIONS


COLD CRANKING AMPS (CCA)	400 CCA
	Test reference: AS60095.1: 2022 Rated CCA DCH at 18°C for 30 sec
CAPACITY (RC)	75 mins
	Test reference: AS60095.1: 2022 25 Amps DCH at 10.5 V cut-off voltage

AMPERE-HOUR (20-HOUR CAPACITY)	45 AH
	Test reference: AS60095.1: 2022
	Rated AH DCH at 10.5 V cut-off
PLATE DESIGN	Lead-Calcium Alloy Full Frame Plate Design
ELECTROLYTE	36% H2SO4 at 15°C


TOP VIEW



FRONT VIEW

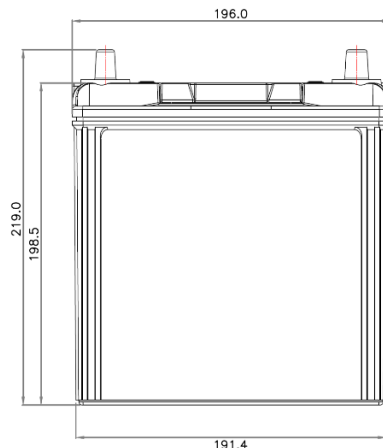

SIDE VIEW

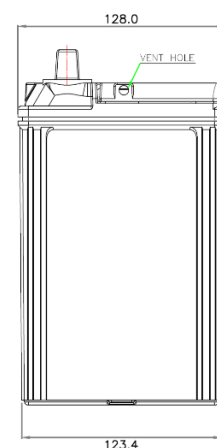

Two Great Stores to choose from...
 7 Cemetery Rd, Mackay QLD 4740 | Phone 07 4957 6123
 Unit 16, 547 Woolcock St, Mt Louisa, Townsville QLD 4814 | Phone 07 4774 7344