

EXIDE®

Batteries

Revision No. 00
Release Date: May 2025



24 Months Warranty*

*for PRIVATE passenger vehicle use, subject to terms and conditions


DIMENSIONAL SPECIFICATIONS

OVERALL DIMENSIONS	METRIC (mm)
LENGTH	237
WIDTH	171
HEIGHT (bottom to top cover)	182
TOTAL HEIGHT (bottom to top of terminal)	208
NOMINAL WEIGHT	16.08 kg

TECHNICAL SPECIFICATIONS

COLD CRANKING AMPS (CCA)	620 CCA
	Test reference: AS60095.1: 2022 Rated CCA DCH at 18°C for 30 sec
CAPACITY (RC)	110 mins
	Test reference: AS60095.1: 2022 25 Amps DCH at 10.5 V cut-off voltage

TOP VIEW




PART NUMBER	MSST22	
CHARACTERISTIC	Lead-Acid Sealed Maintenance Free	
GROUP SIZE	A46	
CASE AND LID	Material	Polypropylene (PP)
	Handle	1-pc PP handle
	Case Colour	Black Casing
	Lid Colour	Black Lid
	Ledge / Hold-down	Recessed ledge on all sides
	Vent	Centralized venting

TERMINAL DATA	POSITIVE	NEGATIVE
TYPE	Dual Fit Aligned	Dual Fit Aligned
TERMINAL HEIGHT (mm)	24.0±0.2	24.0±0.2
BOTTOM DIAMETER (mm)	20.1+0/-0.3	18.5+0/-0.3
TAPER	1:9	1:9
POLARITY		

AMPERE-HOUR (20-HOUR CAPACITY)	61 AH
	Test reference: AS60095.1: 2022
	Rated AH DCH at 10.5 V cut-off
PLATE DESIGN	Lead-Calcium Alloy Full Frame Plate Design
ELECTROLYTE	36% H2SO4 at 15°C

FRONT VIEW

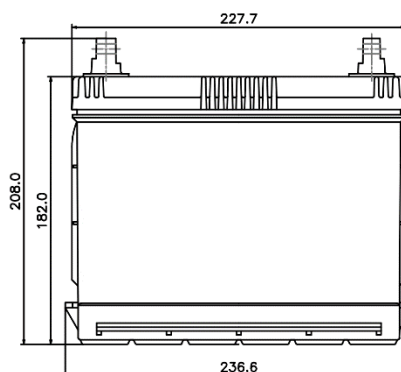

SIDE VIEW

